X SUNNEX

SL6

The SL6 series is suitable for industrial environments. The IP65 version is particularly adapted to harsh environments where dust and moisture resistance is vital. Typical applications include grinders, lathes, drilling machines and outdoor use. SL6 series spotlights have a flexible gooseneck style arm available in two lengths. It can be supplied with a 100-240V AC/DC adaptor.

The SL6 series is equipped with high-intensity LEDs having a color temperature of 4000K which is suitable for demanding tasks. LED technology delivers low energy consumption and long service life as well as high vibration durability and virtually no radiated heat in the light beam.

The lamp head is made from aluminium which allows good heat dissipation and protection against the tough environments it will be subjected to in industrial applications.

Customized versions are available upon request.

Features Include

LED service life >30,000 hours IP20/IP65 20/27 in with swivel joint 12-24V (standard) 20/27 in without joint IP65 12-24V Plugin AC/DC adaptor 100-240/12V, IP44 available as accessory

Applications

Focused task light for industrial applications Tasklight for vehicles Marine applications

Benefits

High quality materials Efficient light pattern Rugged flexible arm Durable design High color rendering



Sunnex, Inc. North American Headquarters • 8001 Tower Point Drive • Charlotte, NC 28227 Tel: 1-800-445-7869 • Fax: 1-888-668-1920 • Web: www.sunnex.com • E-mail: info@sunnex.com

SL6 - SPOTLIGHT LED



Technical Specifications

Supply voltage

Power consumption Arm length Color Color temperature IP rating Protection class Beam angle Light output Color rendering index Weight 12-24V AC/DC, 6-foot cordset (100-240VAC plugin AC/DC adaptor available, IP44) 5.5W 20 inches or 27 inches Black 4000K IP25 or IP65 Class III 10 degrees standard (25 as accessory) 300Lm, 30,600Lx at 50 cm distance, 10 degrees 92 2.5 pounds - 20 inches 2.0 pounds - 27 inches

Lifespan




2.0 pounds - 27 inch > 30,000 hours

SL6 LED Light, 12V/6W, 25°



Model	Arm Length	Details	Part Number
SL6	20 inches	Swivel Joint, Low Voltage	SL6-20SJL
SL6	20 inches	Swivel Joint, High Voltage	SL6-20SJH
SL6	20 inches	IP65, Low Voltage	SL6-20IP65L
SL6	20 inches	IP65, High Voltage	SL6-20IP65H
SL6	27 inches	Swivel Joint, Low Voltage	SL6-27SJL
SL6	27 inches	Swivel Joint, High Voltage	SL6-27SJH
SL6	27 inches	IP65, Low Voltage	SL6-27-IP65L
SL6	27 inches	IP65, High Voltage	SL6-27-IP65H

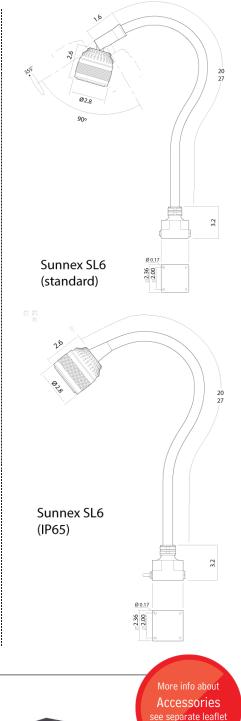



Sunnex reserves the right to change this information without further notice and holds no liability for printing errors in this content. Copyright © Sunnex, Inc. All Rights Reserved.



Sunnex, Inc. North American Headquarters • 8001 Tower Point Drive • Charlotte, NC 28227 Tel: 1-800-445-7869 • Fax: 1-888-668-1920 • Web: www.sunnex.com • E-mail: info@sunnex.com