x sunnex®

SL3

The SL3 is a versatile LED task light for industrial and other professional applications where flexibility is of importance. It is available in IP65 version for use in harsh environments with a dimmable version also available.

Typical applications are lighting for the machining industry, inspection, and in vehicles. The LED-technology delivers low energy consumption and long service life as well as high vibration durability and virtually no radiated heat in the light beam. The high CRI value ensures high quality of the emitted light. Fifteen degree optics are fitted with interchangeable 20 & 30° optics available.

The aluminum lamp head and rugged arm make it usable in a variety of industrial and professional environments. It can be supplied with an external plugin adapter for 230V. The adapter's protection class is IP44.

Customized versions are available upon request

Features Include

Arm length 20 & 27 in with or without joint, spotlight LED Service life > 25,000 hour IP20, IP43 or IP65 Dimmable version 12-24V AC/DC AC/DC-Adaptor (100-240/12V, IP44), available as accessory

Applications

Industrial applications Vehicles Machining industry Inspection & reading

Benefits

Long service life High quality components Flexible arm Sturdy lamp head



Sunnex, Inc. North American Headquarters • 8001 Tower Point Drive • Charlotte, NC 28227 Tel: 1-800-445-7869 • Fax: 1-888-668-1920 • Web: www.sunnex.com • E-mail: info@sunnex.com

SL3 - SPOTLIGHT LED


Technical Specifications

Power consumption
Arm length
Color
Color temperature
IP rating
Protection class
Beam angle
Light output

Color rendering index Weight Lifespan 12-24V AC/DC; 6' cordset (100-240VAC plugin AC/DC adaptor available, IP44) 3.3W 20 or 27 inches and spotlight Black 4000K IP20, IP43, IP65 depending on version Class III 15 degrees (30 DIM) 270Lm, 8,800Lux at 50 cm, 15 degrees (20 & 30 available as option) >92 1.3-2.2 lb >30,000 hours








SL3 LED Light 12V/3, 3W, 15° SL3 LED Light 12V/3, 3W, 20°

ht 12V/3, 3W, 20° SL3 LED Light 12V/3, 3W, 30°

Ĕ.

Model	Arm Length	Details	Part Number
SL3	Spot	Low Voltage	SL3-00L
SL3	Spot	High Voltage	SL3-00H
SL3	20 inches	Low Voltage	SL3-20L
SL3	20 inches	High Voltage	SL3-20H
SL3	27 inches	Low Voltage	SL3-27L
SL3	27 inches	High Voltage	SL3-27H

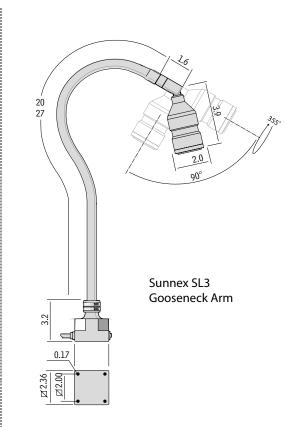



Sunnex SL3 Lamp Head



Sunnex reserves the right to change this information without further notice and holds no liability for printing errors in this content. Copyright © Sunnex, Inc. All Rights Reserved.



Sunnex, Inc. North American Headquarters • 8001 Tower Point Drive • Charlotte, NC 28227 Tel: 1-800-445-7869 • Fax: 1-888-668-1920 • Web: www.sunnex.com • E-mail: info@sunnex.com

